


PZF SERIES

NEW

Load Life : 125°C 4000 hours (Hybrid Type), Lead Wire Type

## ◆FEATURES

- High Voltage (~63Vdc), Ultra Low ESR, High Ripple Current, Miniaturized.
- RoHS compliance.

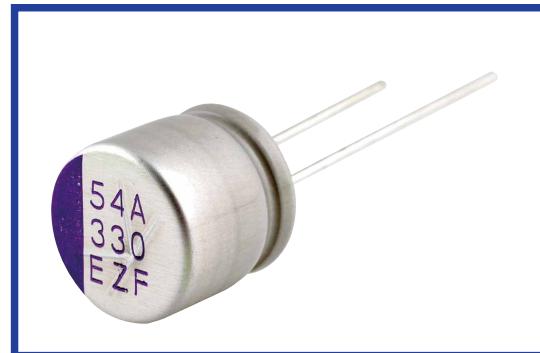

## ◆SPECIFICATIONS

Items	Characteristics									
Category Temperature Range	−55~+125°C									
Rated Voltage Range	25~63Vdc									
Capacitance Tolerance	±20% (20°C, 120Hz)									
Leakage Current(MAX)	The value is shown in "STANDARD SIZE" table (After 2 minutes)									
(tanδ) Dissipation Factor(MAX)	The value is shown in "STANDARD SIZE" table (20°C, 120Hz)									
Endurance	<p>After applying rated voltage with rated ripple current for 4000 hours at 125°C, the capacitors shall meet the following requirements.</p> <table border="1"> <tr> <td>Capacitance Change</td> <td>Within ±30% of the initial value.</td> </tr> <tr> <td>Dissipation Factor</td> <td>Not more than 200% of the initial specified value.</td> </tr> <tr> <td>E.S.R.</td> <td>Not more than 200% of the initial specified value.</td> </tr> <tr> <td>Leakage Current</td> <td>Not more than the initial specified value.</td> </tr> </table>		Capacitance Change	Within ±30% of the initial value.	Dissipation Factor	Not more than 200% of the initial specified value.	E.S.R.	Not more than 200% of the initial specified value.	Leakage Current	Not more than the initial specified value.
Capacitance Change	Within ±30% of the initial value.									
Dissipation Factor	Not more than 200% of the initial specified value.									
E.S.R.	Not more than 200% of the initial specified value.									
Leakage Current	Not more than the initial specified value.									
Biased Humidity	<p>After applying rated voltage for 2000 hours at 85°C and humidity of 85%, the capacitors shall meet the following requirements.</p> <table border="1"> <tr> <td>Capacitance Change</td> <td>Within ±30% of the initial value.</td> </tr> <tr> <td>Dissipation Factor</td> <td>Not more than 200% of the initial specified value.</td> </tr> <tr> <td>E.S.R.</td> <td>Not more than 200% of the initial specified value.</td> </tr> <tr> <td>Leakage Current</td> <td>Not more than the initial specified value.</td> </tr> </table>		Capacitance Change	Within ±30% of the initial value.	Dissipation Factor	Not more than 200% of the initial specified value.	E.S.R.	Not more than 200% of the initial specified value.	Leakage Current	Not more than the initial specified value.
Capacitance Change	Within ±30% of the initial value.									
Dissipation Factor	Not more than 200% of the initial specified value.									
E.S.R.	Not more than 200% of the initial specified value.									
Leakage Current	Not more than the initial specified value.									
Low Temperature Characteristics Impedance Ratio(MAX)	$Z(-55^\circ\text{C})/Z(+20^\circ\text{C}) \leq 2.0$ (100kHz) $Z(-25^\circ\text{C})/Z(+20^\circ\text{C}) \leq 1.5$									


## ◆PART NUMBER

□□□      PZF      □□□□□□      M      □□□      □□      D×L  
 Rated Voltage    Series    Capacitance    Capacitance Tolerance    Option    Lead Forming    Case Size

## ◆MULTIPLIER FOR RIPPLE CURRENT

Frequency(Hz)	120	1k	10k	100k≤
Coefficient	0.05	0.30	0.70	1.00

## ◆MARKING




※Voltage code

Rated Voltage (Vdc)	25	35	50	63
Voltage code	E	V	H	J

## ◆DIMENSIONS

(mm)

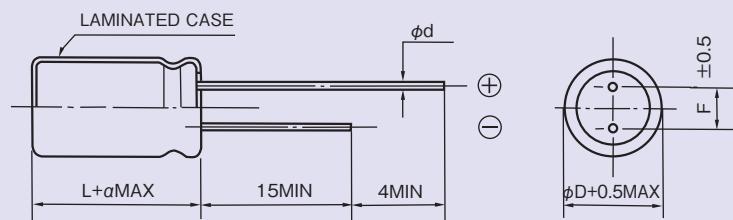

$\phi D$	8	10
L	9	9
F	3.5	5.0
$\phi d$	0.6	
$a$	2.0	

## ◆STANDARD SIZE

Rated Voltage (Vdc)	Capacitance ( $\mu$ F)	Size $\phi D \times L$ (mm)	(tan $\delta$ ) (120Hz, 20°C)	Leakage Current ( $\mu$ A/2min)	E.S.R. (m $\Omega$ max/20°C, 100kHz)	Rated Ripple Current (mArms/125°C, 100kHz)
25	220	8×9	0.14	55.0	27	1600
	330	10×9	0.14	82.5	20	2000
35	150	8×9	0.12	52.5	27	1600
	270	10×9	0.12	94.5	20	2000
50	68	8×9	0.10	34.0	30	1250
	100	10×9	0.10	50.0	28	1600
63	33	8×9	0.08	20.8	40	1100
	56	10×9	0.08	35.3	30	1400