

DB2605-AC EV Charging Controller

Datasheet

Rev 1.0.13, July 2026

Contents

1 Overview	3
1.1 HomePlug Green PHY	3
1.2 Charge Software Stack	3
1.3 Hardware Security Module	3
1.4 Diagram	4
1.5 Host Interface	4
2 Information	5
2.1 General	5
2.2 Pin Definitions	5
2.3 Power-on Configuration	6
2.4 Form Factor	7
2.5 Recommended Solder Footprint	8
2.6 Recommended Paste Footprint	9
2.7 Recommended Reflow Information	9
3 Electrical Characteristics	11
3.1 Recommended Operating Rating	11
3.2 Environment	11
3.3 DC Switching Thresholds	11
3.4 Current Consumption	11
4 Applications	12
4.1 Pilot Signal managed by Host Module	12
5 Reference Designs	13
5.1 Zero Crossing Circuit	13
5.2 HPGP Coupler	13
6 Packaging Information	15
7 Marking	15
8 Ordering	15
9 Design and Development	16
Legal Information	17
Contacting Dropbeats Technology	17
Revision History	18

1 **Overview**

The DB2605-AC EV Charging Controller is the core unit of a Supply Equipment Communication Controller (SECC) that manages EV Combined Charging System (CCS) AC high-level charging and basic charging.

The DB2605-AC EV Charging Controller is equipped with a Qualcomm QCA700X and a powerful MCU that runs RTOS with a complete ISO 15118-2/20 software stack and an optional IEC 61851 stack.

1.1 **HomePlug Green PHY**

The DB2605-AC fully supports HomePlug Green PHY Spec 1.1 (IEEE 1901). HPGP features:

- Spectrum: 2 – 30 MHz
- Max PHY rate: 10Mbps
- Modulation: OFDM
- Subcarriers: 917
- Subcarrier space: 24.414kHz
- ROBO: 4Mbps (5x repeat code), 5Mbps (4x repeat code), 10Mbps (2x repeat code)

1.2 **Charge Software Stack**

The DB2605-AC complies with

- ISO 15118-3
- ISO 15118-2/20 AC EIM and PnC
- ISO 15118-20 Bidirectional charging with security

1.3 **Hardware Security Module**

- Security certification: CC EAL4+ (HW + JCOP), FIPS 140-2 L3
- ECC crypto curves: ECC NIST (192 to 521 bit)/ed448
- Secure key storage: up to 50k bytes

1.4 Diagram

Figure 1 shows controller components as well as necessary connections and external components.

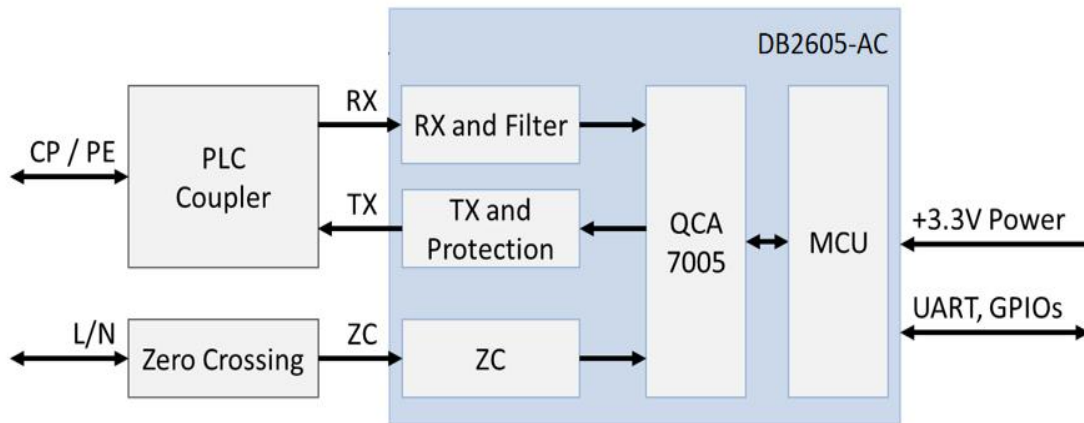


Figure 1 – DB2605-AC Block Diagram

All DB2605-AC components are protected by a metal shield. Information about the controller is printed on a high-temperature label on this shield.

1.5 Host Interface

The DB2605-AC connects to a host module via a UART interface, a reset pin, and a boot pin.

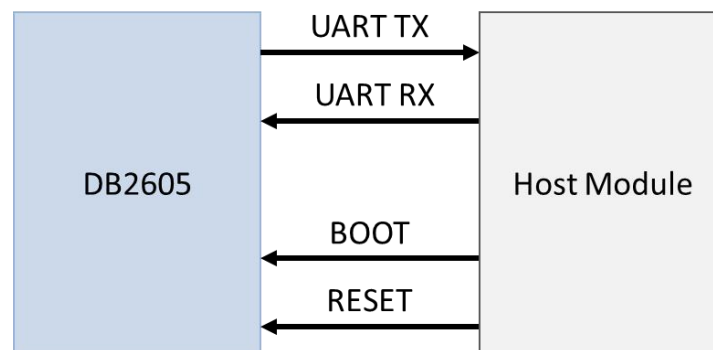


Figure 2 – Block Diagram of UART Pins

UART serial port setting: 115200bps; 8-N-1

2 Information

2.1 General

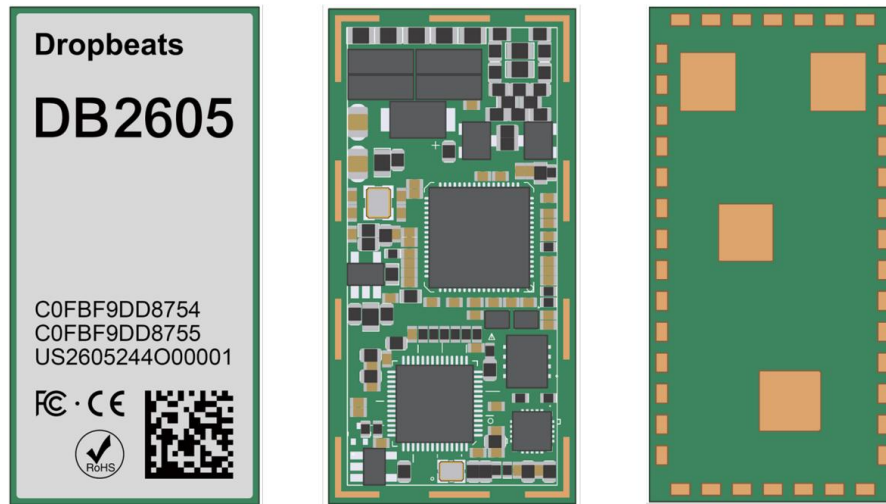


Figure 3 – Images of DB2605-AC EV Charging Controller

2.2 Pin Definitions

Pin	Name	Type	Usage
1	GND	P	Ground
2	HPGP_RX-	IA	Power line coupling transformer Rx-
3	HPGP_RX+	IA	Power line coupling transformer Rx+
4	HPGP_TX-	OA	Power line coupling transformer Tx-
5	HPGP_TX+	OA	Power line coupling transformer Tx+
6	GND	P	Ground
7	HPGP_ZC_IN	IA	Power line zero crossing in If not used, connect to ground.
8	GND	P	Ground
9	PWM	O	Reserved Not recommended for new designs.
10	GND	P	Ground
11	ADC_CP	IA	Reserved Not recommended for new designs.
12	ADC_PP	IA	Reserved Not recommended for new designs.
13	GND	P	Ground
14	UART0_TX	O	UART0 Tx
15	UART0_RX	I	UART0 Rx
16	USB_DP	I/O	Reserved
17	USB_DM	I/O	Reserved
18	GPIO25	I/O	Reserved
19	GPIO26	I/O	Reserved

Pin	Name	Type	Usage
20	GPIO27	I/O	Reserved
21	GPIO28	I/O	Reserved
22	GPIO29	I	Reserved Pull-down to ground in AC EVSE Application. <i>*Pull-up to 3.3 V: Enables the PWM Signal Generation and Detection function. This mode is not recommended for new designs.</i>
23	GPIO30	I/O	Reserved
24	GPIO31	I/O	Reserved
25	GPIO32	I/O	Reserved
26	GPIO34	I/O	Reserved
27	GPIO33	I/O	Reserved
28	GND	P	Ground
29	Vdd	P	Power supply, 3.3V
30	GND	P	Ground
31	I2C0_SDA	I/O	Reserved, leave floating
32	I2C0_SCL	I/O	Reserved, leave floating
33	CAN_TX	I/O	Reserved
34	CAN_RX	I/O	Reserved
35	GPIO19	I/O	Reserved
36	GPIO20	I/O	Reserved
37	GND	P	Ground
38	/RESET	I	Power-on reset. Active low power-on-reset input.
39	BOOT	I	Boot mode setting
40	GND	P	Ground
41	GND	P	Ground
42	GND	P	Ground
TPAD1	GND	P	Ground
TPAD2	GND	P	Ground
TPAD3	GND	P	Ground
TPAD4	GND	P	Ground

2.3 Power-on Configuration

One pin of the DB2605-AC is sampled at boot (bootstrap) to obtain the desired configuration.

Pin	Function	Description
BOOT	Boot mode	High: Boot from UART0 (pins 14/15). This mode is mainly used for firmware upgrade. Low: Launch application image from flash

2.4 Form Factor

Width * Length * Height: 20.32 * 40.64 * 4.4 mm


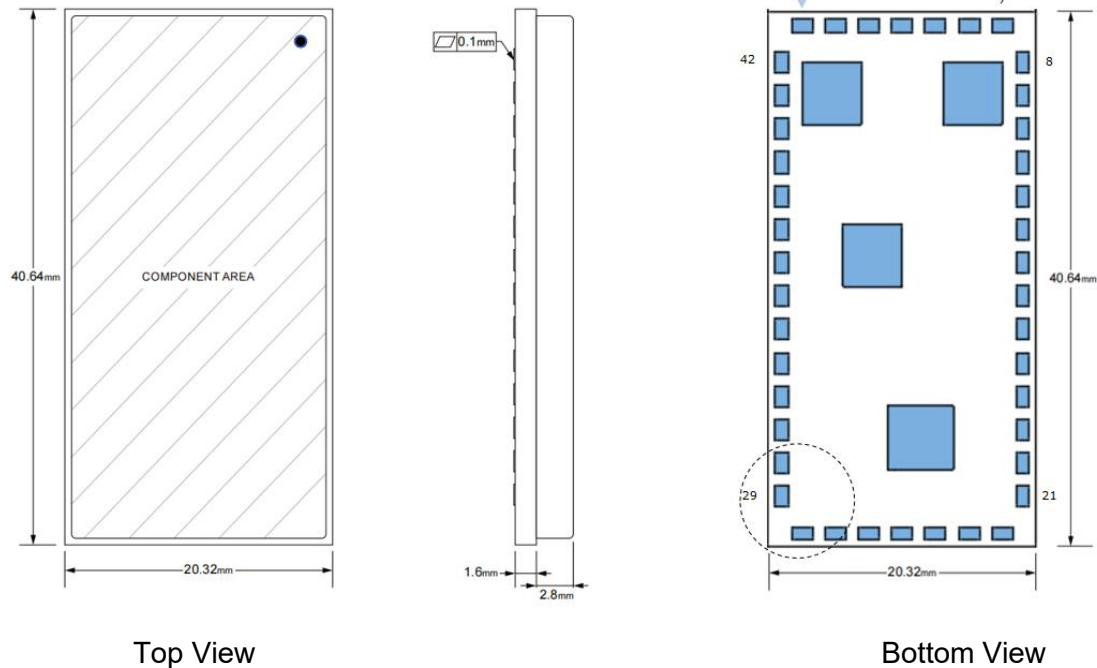


Figure 4 – DB2605-AC Form Factor

Tolerance:

- 1 Width Tolerance: $\pm 0.13\text{mm}$
- 2 Length Tolerance: $\pm 0.13\text{mm}$
- 3 Height Tolerance: $\pm 0.14\text{mm}$
- 4 Pin Pad Tolerance: $\pm 0.03\text{mm}$



2.5 Recommended Solder Footprint

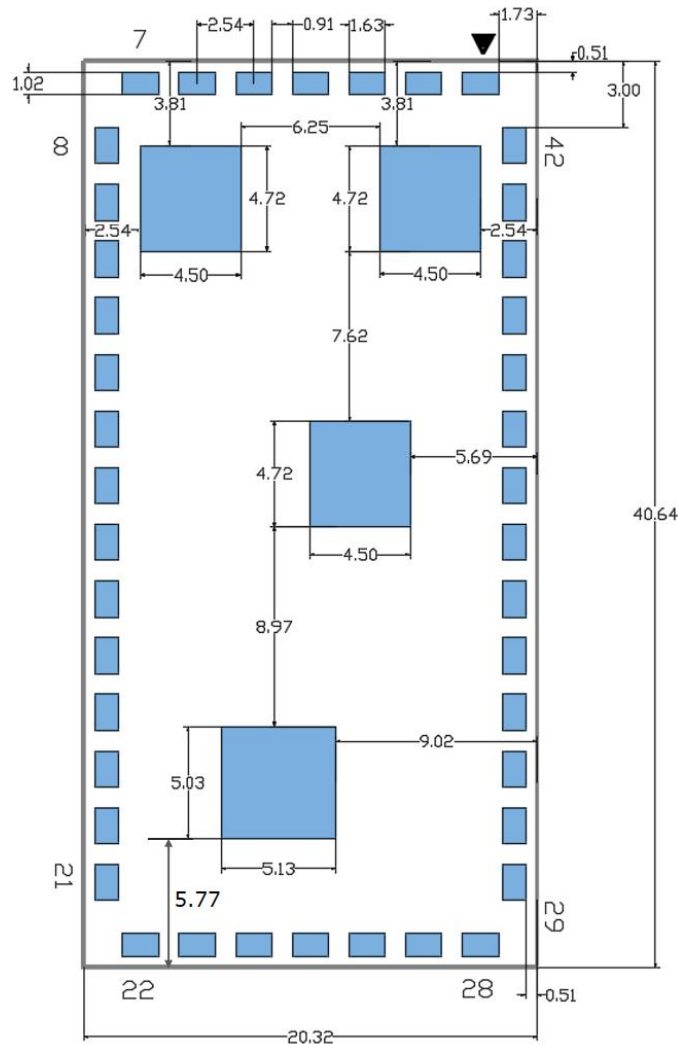


Figure 5 – Recommended Solder Footprint

Notes:

- 1 Top view, as seen through the DB2605-AC from the Top.
- 2 DB2605-AC outline shows nominal dimensions; tolerance is not included.
- 3 All dimensions in mm.
- 4 Pads are all the same size.
- 5 Distances between pads are equal
- 6 The solder footprint pads are recommended to be fully consistent with the pin pads.

2.6 Recommended Paste Footprint

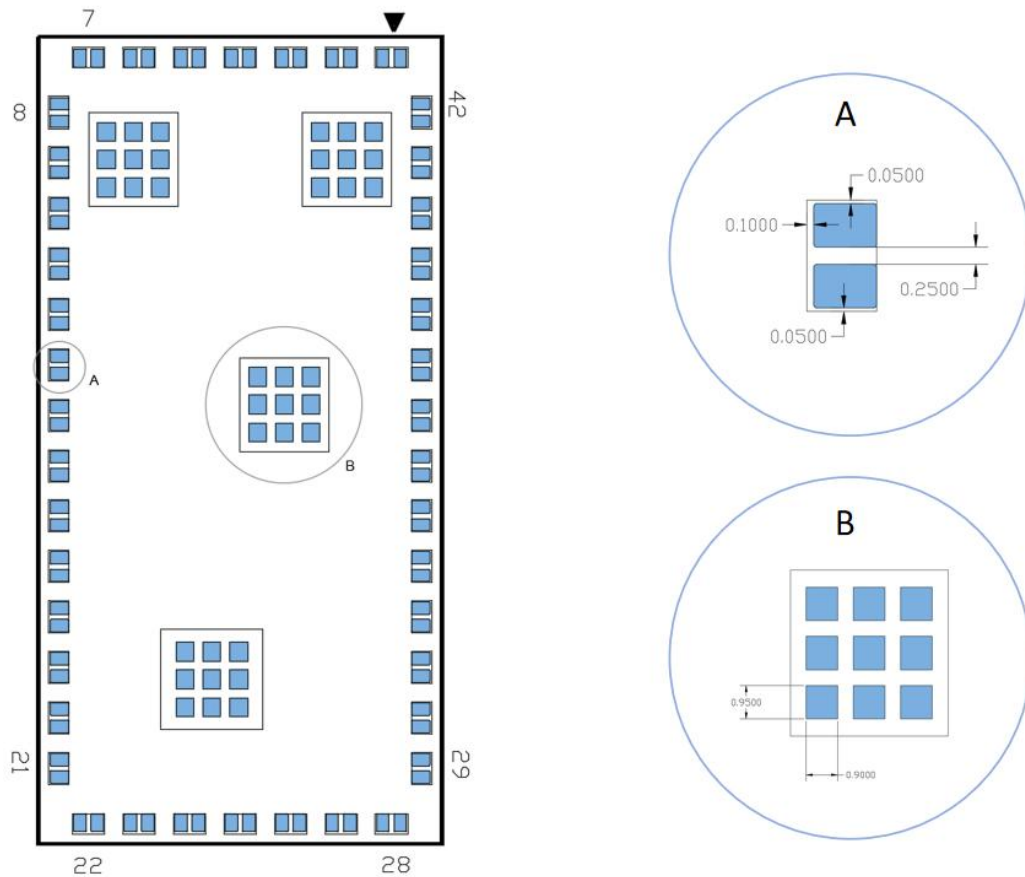


Figure 6 – Recommended Paste Footprint

2.7 Recommended Reflow Information

	Low Limit	High Limit	Units
Max Rising Slope (Target=2.5)	1	5	Degrees/Second
Slope1 (Target=2.3)	0.5	4	Degrees/Second
Between 180.0 and 220.0			
Max Falling Slope	-3	-1	Degrees/Second
Soak Time 150-180C	60	100	Seconds
Time Above Reflow - 220C	30	90	Seconds
Peak Temperature	235	250	Degrees Celsius

Reflow Profile Setting Example:

Degree Celsius

Zone	1	2	3	4	5	6	7	8	9	10
	150	160	180	180	180	180	200	220	235	260

Conveyor Speed (cm/min): 90

Reflow Profile Example:

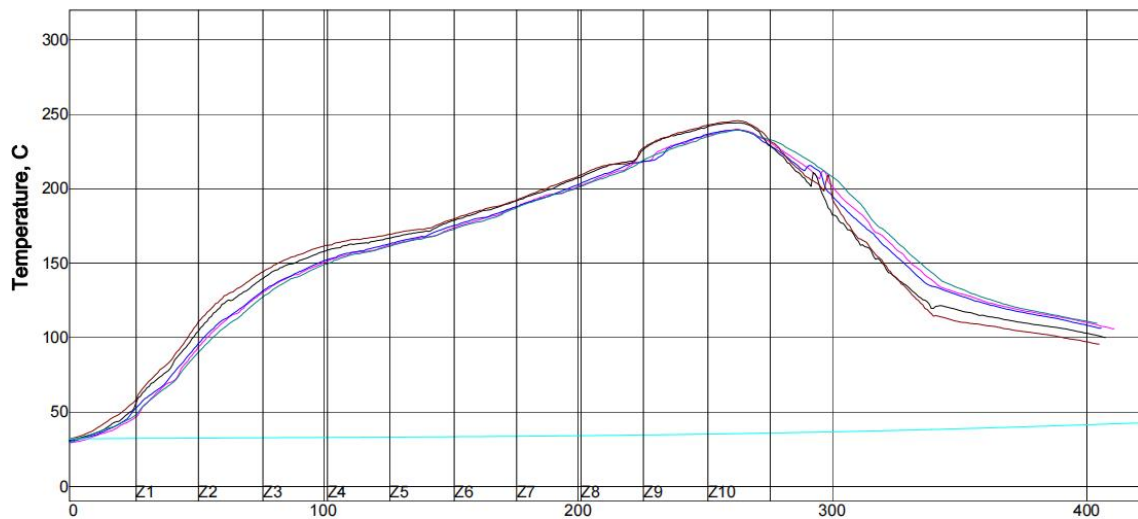


Figure 7 – Reflow Profile Example

3 Electrical Characteristics

3.1 Recommended Operating Rating

Symbol	Parameter	Min	Typ	Max	Units
Vdd	Power Supply	3.13	3.3	3.46	V

3.2 Environment

Environmental Condition	
Operating Temperature	-40 – 85 °C
Storage Temperature	-40 – 105 °C

3.3 DC Switching Thresholds

Symbol	Parameter	Test Conditions	Min	Max	Units
VIL	Low-level input voltage		—	0.3*Vdd	V
VIH	High-level input voltage		0.7*Vdd	—	V
VOL	Low-level output voltage	IOL = 4 mA, 12mA ¹	—	0.4	V
VOH	High-level output voltage	IOH = -4 mA, -12 mA ²	2.4	—	V
IOZ	High-impedance output current	Gnd ≤ VI ≤ Vdd	-1	+1	μA

- ¹ IOL = 12 mA for all GPIOs
IOL = 4 mA for all other interfaces
- ² IOH = -12 mA for all GPIOs
IOH = -4 mA for all other interfaces

3.4 Current Consumption

Parameter	Value
Max power dissipation	300mA
Typical power dissipation	200mA

4 Applications

4.1 Pilot Signal managed by Host Module

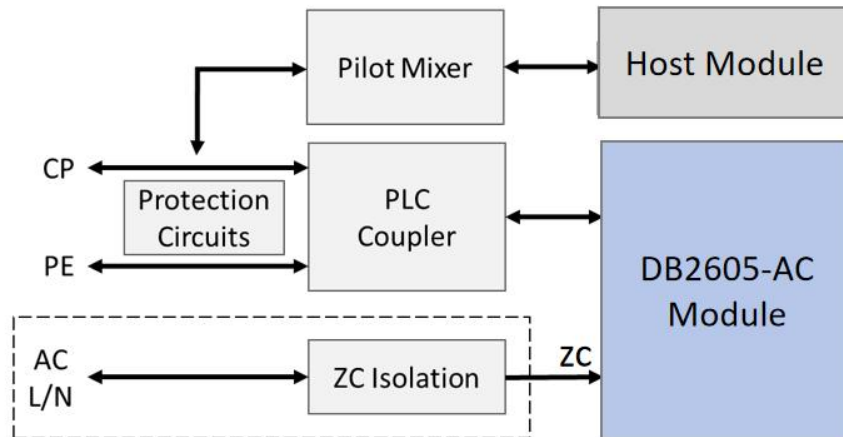


Figure 8 – Control Pilot Signal Managed by Host Module

Note:

AC power line zero-crossing detection requires an external opto-coupler and filter circuits; If zero-crossing detection is not required, connect the ZC pin to ground.

5 Reference Designs

5.1 Zero Crossing Circuit

A zero crossing function may be used to synchronize other PLC devices for bandwidth management.

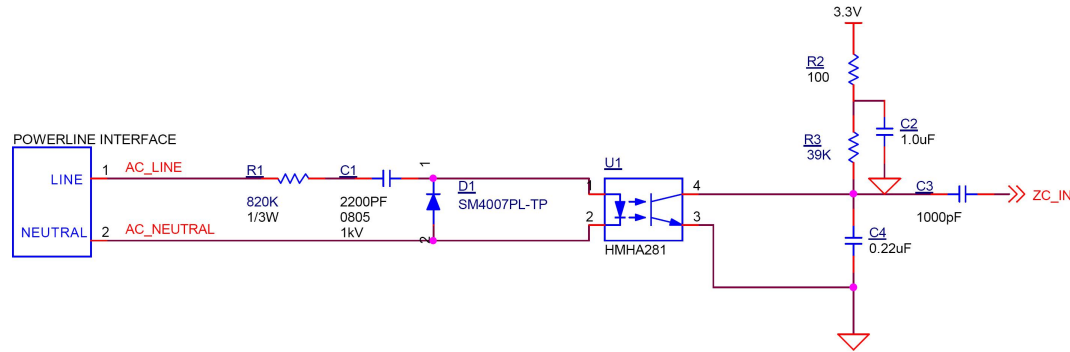


Figure 10 – HPGP Zero Crossing Circuit

Note:

An optocoupler is used for isolation between the high-voltage and low-voltage sides, resulting in a relatively large circuit footprint. If space constraints do not allow this, connect ZC_IN to GND to reduce the circuit area.

5.2 HPGP Coupler

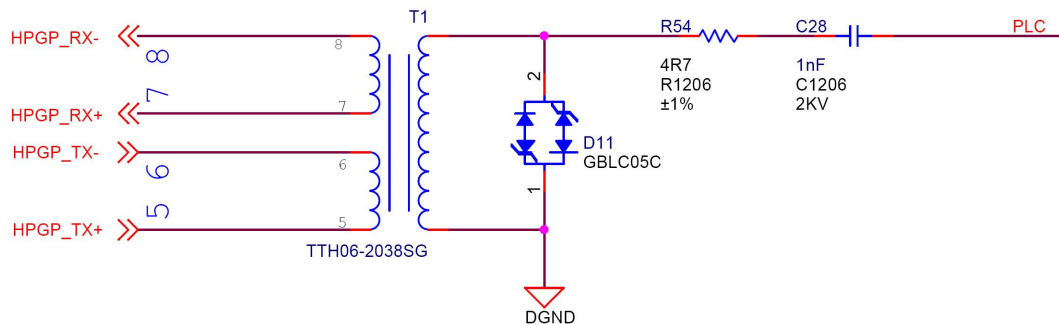


Figure 11 – HPGP Coupler Circuit

Note:

A coupling capacitor blocks the DC voltage present on the pilot wire. The component values may change after component optimization.

A 1:1:1 turn ratio transformer and a 4.7 Ω series resistor limit transient current and set the output impedance to about 6 Ω . This current-limiting resistor value may be adjusted slightly to trim the transmitter output voltage amplitude.

A TVS diode is placed across the PLC coupling transformer to isolate the second stage circuitry and clamp surge voltage to a more acceptable level for the DB2605-AC.

Recommended Coupler Transformer

Part No.	Vendor	Features	Description
TTH06-2038SG	Dropbeats	Industrial	AC EVSE Application


6 Packaging Information

The polystyrene carrier tape package contains 200 DB2605-AC per reel.

7 Marking

Each Controller is marked with the following data:

- Dropbeats brand
- Controller identifier DB2605
- Product Name
- Product Hardware Version and Manufacture Date(MFD)
- HPGP Modem MAC address
- HOST MCU MAC address
- Serial Number
- Certification logos
- QR code with HPGP Modem MAC address

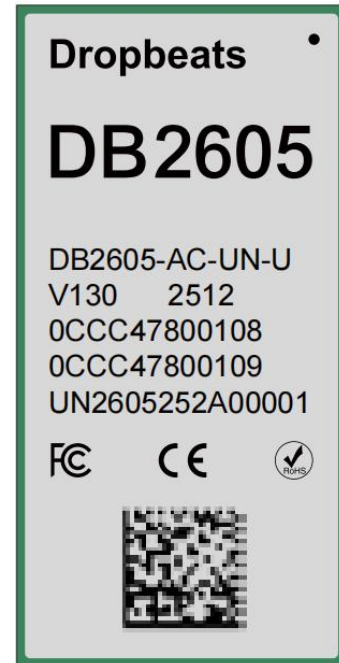

8 Ordering

Order Code	Chipset	Temperature Range	Interface	Applications
DB2605-AC-UN-U-V130	QCA7005-AL33	-40 – 85°C	UART	AC EVSE
Notes: DB2605-AC is intended for AC EVSE applications.				

9 Design and Development

Product	Description
DB2605-AC EV Charging HAT	DB2605-AC with jumpers and connector. A platform that allows evaluation, software development, and integration of the DB2605-AC, the ISO 15118-2/20 AC charging solution.
DB2605-AC EV Charging Raspberry Pi Kit	DB2605-AC EV Charging HAT plus Raspberry Pi
DB2605-AC EV Charging Evaluation Kit	DB2605-AC EV Charging Raspberry Pi Kit extended to include EV coupler and EV simulator, which allow quick evaluation of EV charging designs

Legal Information

Copyright

Copyright 2026 Dropbeats Technology Co., Ltd. All rights reserved.

The information in this document is proprietary and confidential to Dropbeats Technology Co., Ltd., and for its customers' internal use. No part of this document may be reproduced or redistributed in any form without the express written consent of Dropbeats Technology Co., Ltd.

Disclaimer

None of the information contained in this document constitutes an express or implied warranty by Dropbeats Technology Co., Ltd. as to the sufficiency, fitness or suitability for a particular purpose of any such information or the fitness, or suitability for a particular purpose, merchantability, performance, compatibility with other parts or systems, of any of the products of Dropbeats Technology Co., Ltd., or any portion thereof, referred to in this document. Dropbeats Technology Co., Ltd. expressly disclaims all representations and warranties of any kind regarding the contents or use of the information, including, but not limited to, express and implied warranties of accuracy, completeness, merchantability, fitness for a particular use, or non-infringement.

In no event will Dropbeats Technology Co., Ltd. be liable for any direct, indirect, special, incidental or consequential damages, including, but not limited to, lost profits, lost business, or lost data resulting from any use of or reliance upon the information, whether or not Dropbeats Technology Co., Ltd. has been advised of the possibility of such damage.

Contacting Dropbeats Technology

Dropbeats Technology

123 Juli Road, Building 4, Shanghai, China

Tel: +86 (21) 5085-0752

Fax: +86 (21) 5085-0753

Document Information: document@drop-beats.com

Corporate Information: info@drop-beats.com

Technical Support: apps@drop-beats.com

Web Site: <https://www.drop-beats.com>

Revision History

Revision	Date	Descriptions
1.0.0	2024.4.24	Initial
1.0.1	2024.5.31	Changed document name to Datasheet.
1.0.2	2024.6.4	Changed document name “module” to “controller”
1.0.3	2024.7.6	Updated form factor
1.0.4	2024.7.18	Updated form factor
1.0.5	2024.11.8	Added bottom pads for soldering; added soldering paste footprint; added reflow profile setting.
1.0.6	2025.9.3	Updated marking and Pin 26/27 name.
1.0.7	2025.10.15	Revised Note 1 in Section 2.5 from “Top View” to “Bottom View”.
1.0.8	2025.12.18	Added dimension for the upper edge of the thermal pad in Section 2.5.
1.0.9	2025.12.22	Added dimension for the upper pins in Section 2.5. Changed the names of Section 2.5 and 2.6.
1.0.10	2026.1.9	Renamed DB2605 to DB2605-AC.
1.0.11	2026.5.10	Recommended: The IEC 61851 (Control and Proximity Pilot) function is not handled by DB2605-AC, and the related circuits and descriptions have been removed.
1.0.12	2026.5.11	Added form factor tolerances.
1.0.13	2026.7.31	Updated pin names in Section 2.2 and added "Not recommended for new designs" descriptions.