

Customer : CODICO
Type : 207BX Series Relay

Revised : 2025-10-01
Issued : 2025-04-07

Please sign as of your approval
請校對,無誤後請簽章寄回。
謝謝!



■ Type List

Terminal style	Contact form	Insulation system	Designation (provided with)
			Flux tight
PCB terminal	1A(SPNO)	F	207BX-1AH1-F-C E32

■ Ordering Information

207BX - 1A H 1 - F - C E32

1 2 3 4 5 6 7 8

- | | |
|--------------------------------------|---|
| 1. 207BX -- Basic series designation | 5. F -- Class F |
| 2. 1A -- Single pole normally open | 6. C -- Flux tight |
| 3. H -- Contact material Ag alloy | 7. E32 -- Special feature code |
| 4. 1 -- Enlarge contact gap | 8. <input type="text"/> -- Coil voltage (please refer to the coil rating data for the availability) |

■ Contact Rating

Rated load (Resistive)	Making 10A, Carrying 32A, Breaking 10A / 240VAC, On 1s/ Off 9s, at 85°C, 50K ops. ⁽¹⁾
Rated load (Capacitive)	Inrush 230A 100us, Carrying 32A, Breaking 0A / 240VAC, On 1s/ Off 9s, 2,000 ops. ⁽²⁾
Max. switching load	500A 240VAC, 3 ops. ⁽²⁾
Max. switching current	32A
Max. switching voltage	277VAC

Notes : (1) According to IEC 61851.

(2) According to IEC 62955.

Customer : CODICO

Type : 207BX Series Relay

Revised : 2025-10-01
Issued : 2025-04-07

■ Coil Rating (DC)

Rated voltage (V)	Rated current $\pm 10\%$ at 23°C (mA)	Coil resistance $\pm 10\%$ at 23°C (Ω)	Pick up voltage (Max.) at 23°C ⁽¹⁾	Drop out voltage (Min.) at 23°C	Continuous voltage at 85°C ⁽²⁾	Power consumption at rated / holding voltage
12	233	51	80 % of rated voltage	5 % of rated voltage	32~34 % of rated voltage	approx. 2.8W / 0.29W ⁽²⁾
24	117	206				

Notes : (1) To energize relay properly apply 100%~120% nominal coil voltage for 200ms.

(2) Coil holding voltage is 32~34% of nominal voltage after applying nominal voltage for 200ms.

■ Specification

Contact material	Ag alloy	
Contact resistance ⁽¹⁾	100 m Ω Max. (at 1A/6VDC by 4-wire resistance measurement) 10 m Ω Max. (By voltage drop 20A)	
Operate time ⁽¹⁾	15ms Max.	
Release time ⁽¹⁾	10ms Max.	
Vibration resistance	Operating extremes	10~500Hz , 5.0G
	Damage limits	10~500Hz , 5.0G
Shock resistance	Operating extremes	10G
	Damage limits	100G
Short circuit ⁽⁸⁾	$I_p = 1.85\text{kA}$ and $I^2t=4.5\text{kA}^2\text{s}$ at $I_n \leq 32\text{A}$ according to IEC 62955.	
Life expectancy	Mechanical	100,000 ops. (frequency 9,000 ops./hr)
Operating ambient temperature	-40~+85°C (no freezing) for 32A 240VAC -40~+70°C (no freezing) for 35A 240VAC	
Weight	Approx. 15 g	

Note : (1) Initial value. Operate and release time excluding contact bounce.

(2) Unless otherwise specified, all tests are under room temperature and humidity.

(3) Consider the heat of PCB is necessary, please check the actual condition of PCB.

(4) Applying no diode to this relay. The life expectancy will be lower when a diode is used. To use a varistor (ZNR) could absorb the coil surge of relay that is recommended.

(5) Do not use the relay exceeding the coil rating, contact rating and life expectancy, or this may cause the risk of overheating.

(6) To assure optimum performance, avoid the relay from dropping, hitting, or other unnecessary shocks.

(7) Please pay attention to the phenomenon of freezing in the low temperature environment below 0°C.
Please evaluate the actual use of the environment.

(8) For short circuit test, the test is with fuse and the phase angle is within $\pm 15^\circ$.


Customer : CODICO

Type : 207BX Series Relay

Revised : 2025-10-01
Issued : 2025-04-07

(9) Usage, transport and storage conditions

- 1. Temperature: -40~+85°C
- 2. Humidity: 5 to 85% R.H.
- 3. Pressure: 86 to 106 kPa
- Furthermore, the humidity range varies with the temperature. So, use relays within the range indicated in the graph below.

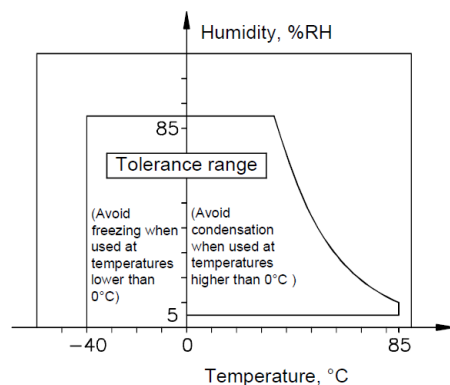

(The allowable temperature range differs for each relay.)

(10) Please contact Song Chuan for the detailed information.

■ Insulation Data

Insulation resistance ⁽¹⁾	100MΩ Min. (DC 500V)	
Surge voltage withstand ⁽¹⁾	Between coil and contact	: 6.0KV (1.2/50)μs
	Between open contacts	: 4.0KV (1.2/50)μs
Dielectric strength ⁽¹⁾	Between coil and contact	: AC 4000V, 50/60Hz 1 min.
	Between open contacts	: AC 1500V, 50/60Hz 1 min.
Insulation of IEC 61810-1		
Clearance / creepage distances	Between coil and contact	: Basic, ≥ 5.0mm / ≥ 5.0mm
	Between open contacts	: Basic, ≥ 1.5mm ⁽²⁾ / ≥ 4.0mm
Rated voltage	480V	
Rated impulse withstand voltage	4000V	
Pollution degree	2	
Overvoltage category	III	

Note : (1) Initial value.

(2) Per IEC 62955, the verification of clearance with the impulse withstand voltage is applied for the shown reduced clearance.

Customer : CODICO
Type : 207BX Series Relay

Revised : 2025-10-01
Issued : 2025-04-07

■ Safety Approval

Certified	UL / CUL	VDE
File No.	E88991	40025801

■ Safety Approval Rating

UL / CUL	VDE
NO : 35A 277VAC ⁽¹⁾	NO : Making 32A, Carrying 35A, Breaking 32A / 250VAC T70

Note : (1) For Non-Industrial application use only.


Confirmed by	Checked by	Prepared by
副總經理 葉家昇 25'.10.07	研發經理 蕭琪騰 25'.10.01	文管中心 周昀萱 25'.10.01

Customer : CODICO

Type : 207BX Series Relay

Revised : 2025-10-01
Issued : 2025-04-07


■ Outline Dimensions

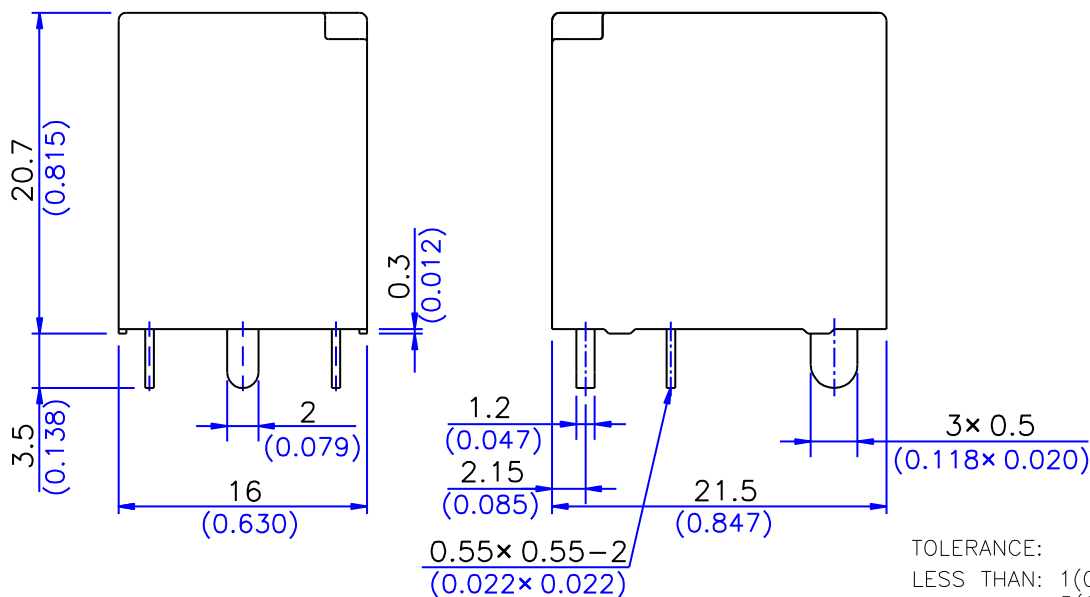


TOLERANCE:
LESS THAN: 1(0.039)±0.1(0.004)
5(0.197)±0.3(0.012)
20(0.787)±0.5(0.020)
MORE THAN:20(0.787)±1(0.039)
UNIT:mm.(in.)

Note : (1) The terminal dimension of the outline drawing is the size before soldering.
(It will become larger after soldering)

■ Wiring Diagram (Bottom view)



■ PC Board Layout (Bottom view)

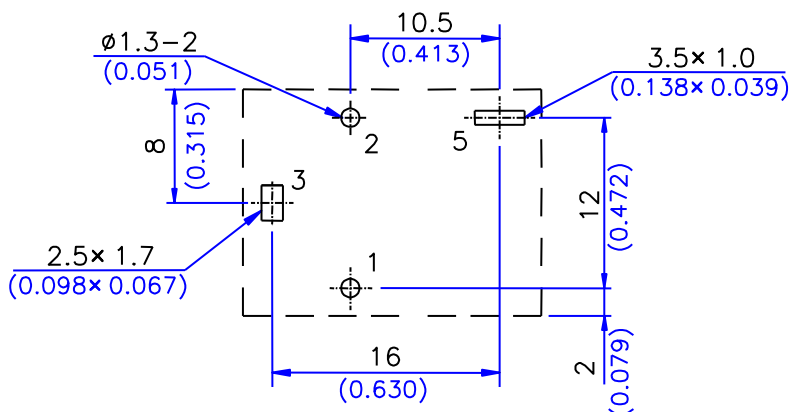


TOLERANCE:±0.1(0.004)
UNIT:mm.(in.)

■ Relay Marking

Customer : CODICO
Type : 207BX Series Relay

Revised : 2025-10-01
Issued : 2025-04-07

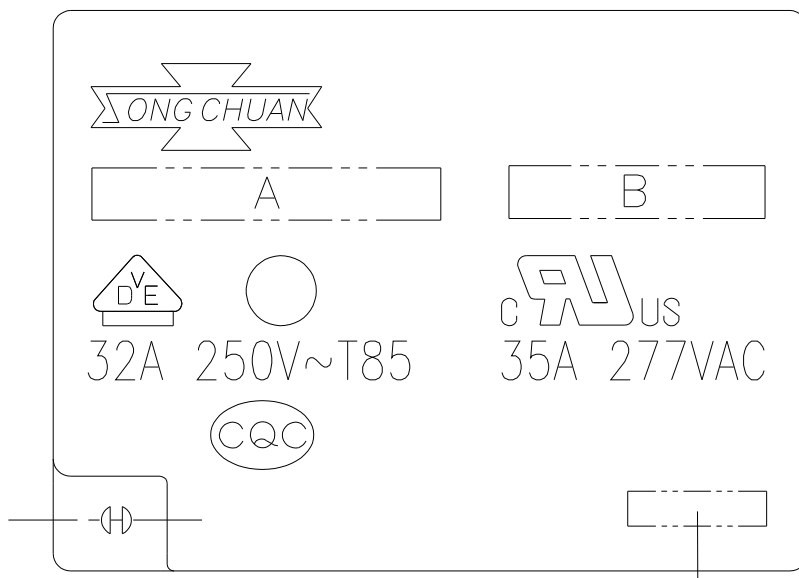

Date code(LOCATION, YEAR, MONTH, DATE, , SHIFT, LINE)

A:PART NUMBER

B:COIL VOLTAGE