

# Features

# Regulated Converters

- Medically certified 2MOPP module, BF ready
- Class II installations (without FG)
- IP68 waterproof encapsulation
- Operation altitude certified up to 5000m
- No external components necessary
- Energy Efficiency Level IV



## RACM30-ER

**30 Watt  
Round  
Shape Single  
Output**



- IEC/EN60950-1 (pending)
- UL60950-1 (pending)
- IEC/EN60601-1 (pending)
- UL60601-1 (pending)
- IEC/EN60335-1 (pending)
- IEC/EN61558-2-16 (pending)

### Description

The RACM30-SER series comprises reliable and highly efficient power conversion modules in a potted IP68 waterproof encapsulation to withstand harsh operating conditions. With a certified operation up to 5000m altitude and less than 2"x2" of required board space, these modules are designed to power compact applications in medical healthcare, household, sanitary, smart building, and automation processes. The product family is covered by medical, household, and ITE safety standards. More than 6dB margin to EMI emissions class B limits eases integration without the need for any external components.

### Selection Guide


Part Number	Input Voltage Range (VAC)	Output Voltage <sup>(1)</sup> (VDC)	Output Current (A)	Efficiency typ. <sup>(2)</sup> (%)
RACM30-12SER <sup>(3)</sup>	90-264	12	2.5	89
RACM30-24SER <sup>(3)</sup>	90-264	24	1.25	89

#### Notes:

Note1: Other output voltages on request

Note2: Efficiency is tested at nominal input (115/230VAC) and full load at +25°C ambient

### Model Numbering

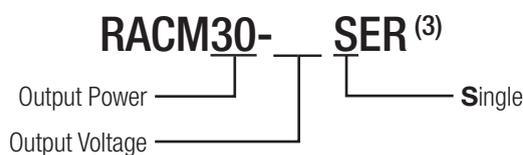

#### Notes:

Note3: Other connection types on request



#### CODICO GmbH



Zwingenstraße 6-8, 2380 Perchtoldsdorf, Austria  
 Telefon: +43 1 86 305-0, Fax: +43 1 86 305-5000  
 e-mail: office@codico.com, www.codico.com  
 FN 436940i, Landesgericht Wr. Neustadt

Zertifiziert nach ISO 9001:2015

**Specifications** (measured @  $t_a = 25^\circ\text{C}$ , nom.  $V_{in}$  (115/230VAC), full load after warm-up unless otherwise stated)

BASIC CHARACTERISTICS				
Parameter	Condition	Min.	Typ.	Max.
Internal Input Filter				Pi type
Input Voltage Range		90VAC	230VAC	264VAC
Input Current	115VAC 230VAC			1000mA 290mA
Inrush Current	115VAC 230VAC		60A 95A	
No load Power Consumption				75mW
Input Frequency Range		47Hz		63Hz
Minimum Load		0%		
Power Factor			0.55	
Start-up Time	115VAC 230VAC		75ms 150ms	
Rise Time	115VAC / 230VAC		10ms	
Hold-up Time	115VAC 230VAC		15ms 55ms	
Internal Operating Frequency	100% load at nominal $V_{in}$		100kHz	
Output Ripple and Noise				75mVp-p

### Efficiency vs. Load

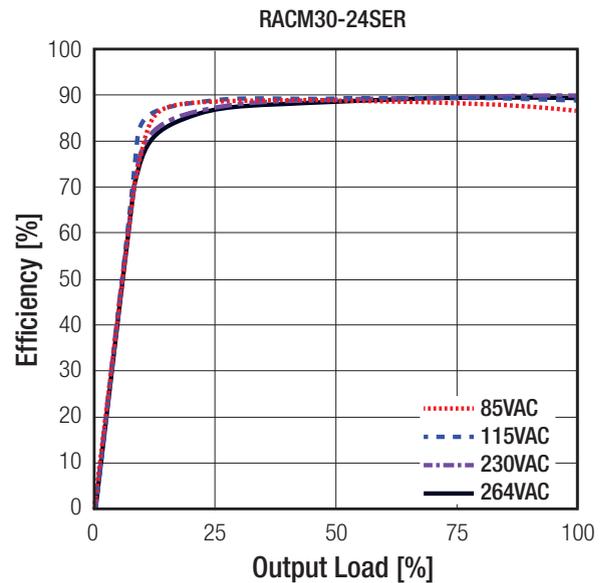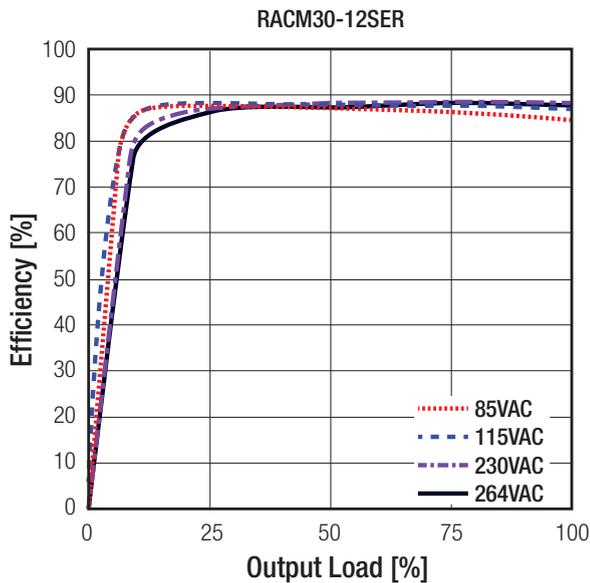


### REGULATIONS

Parameter	Condition	Value
Output Accuracy		$\pm 3.0\%$ max.
Line Regulation	low line to high line, full load	1.0% max.
Load Regulation	0% to 100% load	1.0% max.
Transient Response	100% load step change	$\pm 3.0\%$ max.

continued on next page

**Specifications** (measured @  $t_a = 25^\circ\text{C}$ , nom.  $V_{in}$  (115/230VAC), full load after warm-up unless otherwise stated)

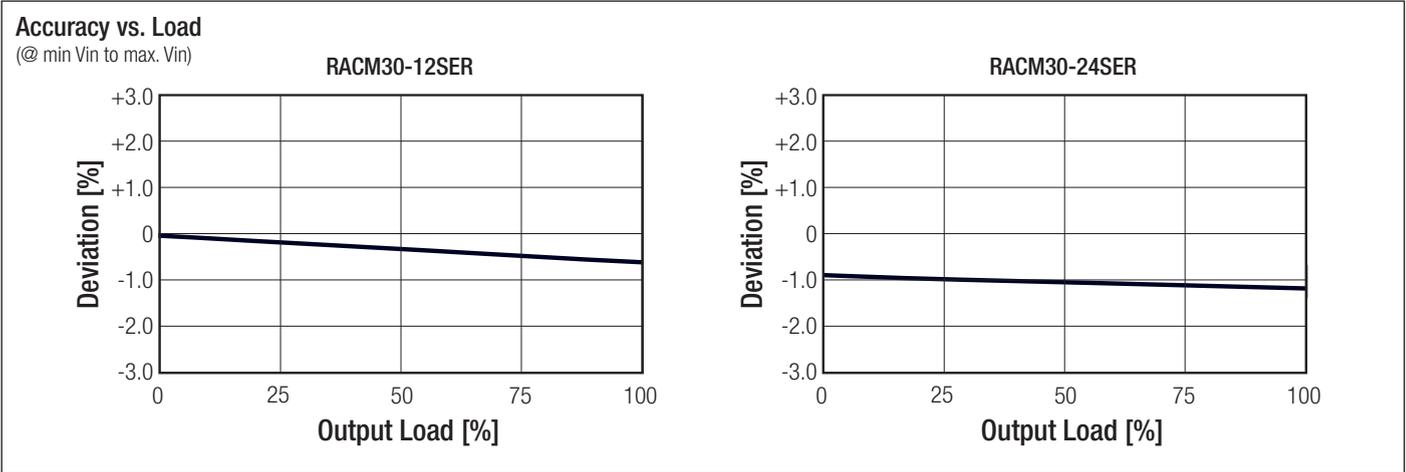


PROTECTIONS			
Parameter	Type		Value
Input Fuse	internal (line & neutral)		T2A, slow blow
Short Circuit Protection (SCP)			continuous, auto recovery
Over Voltage Protection (OVP)	12Vout 24Vout		17VDC, Latch OFF 35VDC, Latch OFF
Over Voltage Category (OVC)			OVCII
Over Current Protection (OCP)	< 1 minute	90VAC 264VAC	140% of nominal output current, auto recovery 170% of nominal output current, auto recovery Hiccup Mode
Over Temperature Protection (OTP)	95°C ambient		thermal shutdown, auto recovery
Class of Equipment			Class II
Isolation Voltage <sup>(3)</sup>	I/P to O/P	tested for 1 minute	4.4kVAC
Insulation Grade			reinforced
Leakage Current			100µA max.
Means of Protection	260VAC working voltage		2MOPP
Medical Device Classification			Type BF
<b>Notes:</b>			
Note3: For repeat Hi-Pot testing, reduce the time and/or the test voltage			

ENVIRONMENTAL			
Parameter	Condition		Value
Operating Temperature Range	(natural convection 0.1m/s)	without derating	-20°C to +50°C
		with derating	-20°C to +70°C
Maximum Case Temperature			+85°C
Operating Altitude			5000m
Operating Humidity	non-condensing		95% RH max.
Pollution Degree			PD2
MTBF	according to MIL-HDBK-217F, G.B.	+25°C	538 x 10 <sup>3</sup> hours
		+50°C	107 x 10 <sup>3</sup> hours
Design Lifetime	E-Cap limitation		130 x 10 <sup>3</sup> hours
continued on next page			

**Specifications** (measured @  $t_a = 25^\circ\text{C}$ , nom.  $V_{in}$  (115/230VAC), full load after warm-up unless otherwise stated)

**Derating Graph**

(@ Chamber and natural convection 0.1 m/s)

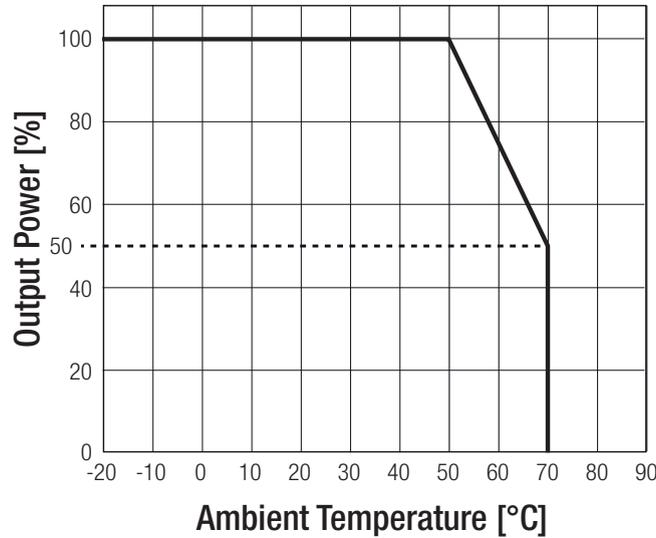

**SAFETY AND CERTIFICATIONS**

Certificate Type (Safety)	Report / File Number	Standard
Information Technology Equipment, General Requirements for Safety (CB Scheme)		IEC60950-1:2005, 2nd Edition +Am2:2013 EN60950-1:2006 + A2:2013
Information Technology Equipment, General Requirements for Safety		UL60950-1, 2nd Edition:2014 CAN/CSA C22.2 No. 60950-1, 2nd Edition:2014
Medical Electric Equipment, General Requirements for Safety and Essential Performance (CB Scheme)		IEC60601-1:2005, AM1:2012 EN60601-1:2006 + A12:2014
Medical Electric Equipment, General Requirements for Safety and Essential Performance		CAN/CSA-C22.2 No. 60601-1:14, 3rd Edition 2014
Household and similar electrical appliances - Safety Part 1: General requirements (CB Scheme)		IEC60335-1:2010 EN60335-1:2012 + A11:2014
RoHs 2 (2+)		RoHs 10/10, AM2015





EMC Compliance	Condition	Standard / Criterion
Electromagnetic compatibility of multimedia equipment - Emission requirements		EN55022: 2010, Class B
Information technology equipment - Immunity characteristics - Limits and methods of measurement		EN55024: 2010
Electromagnetic compatibility - Requirements for household appliances, electric tools and similar apparatus - Part 1: Emission		EN55014-1: 2006 + A2:2011 EN55014-2: 1997 + A2:2008
Medical electrical equipment - Part 1-2: General requirements for basic safety and essential performance - Collateral standard: Electromagnetic compatibility - Requirements and tests		EN60601-1-2, 2007
ESD Electrostatic discharge immunity test	$\pm 8\text{kV}$ Air; $\pm 6\text{kV}$ Contact	EN61000-4-2, Criteria A
Radiated, radio-frequency, electromagnetic field immunity test	3V/m, 80-2500MHz	EN61000-4-3, Criteria A
Fast Transient and Burst Immunity	$\pm 2\text{kV}$	EN61000-4-4, Criteria A
Surge Immunity	L-N $\pm 1\text{kV}$	EN61000-4-5, Criteria A
Immunity to conducted disturbances, induced by radio-frequency fields	3V r.m.s.	EN61000-4-6, Criteria A
Power Magnetic Field Immunity	3A/m	EN61000-4-8, Criteria A
Voltage Dips and Interruption	100/230VAC	EN61000-4-11
Voltage Fluctuations and Flicker in Public Low-Voltage Systems		EN61000-3-3

**Specifications** (measured @ ta= 25°C, nom. Vin (115/230VAC), full load after warm-up unless otherwise stated)

**DIMENSION and PHYSICAL CHARACTERISTICS**

Parameter	Type	Value
Material	Case	non-conductive black plastic, (UL94V-0)
	Potting	polyurethane, (UL94V-0)
	PCB	FR4, (UL94V-0)
Package Dimension (LxWxH)		53.0 x 51.0 x 33.5mm
Package Weight		128g max.

Dimension Drawing (mm)

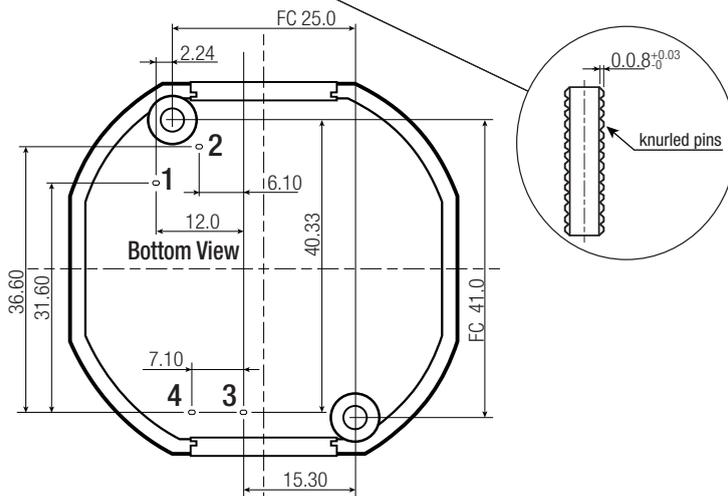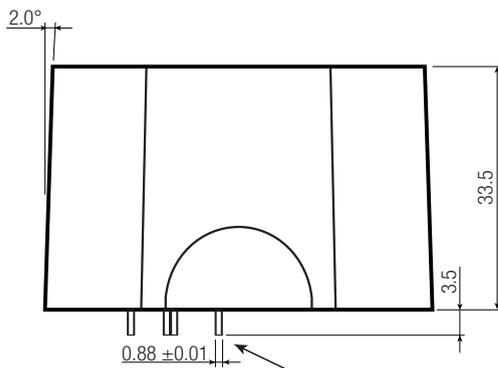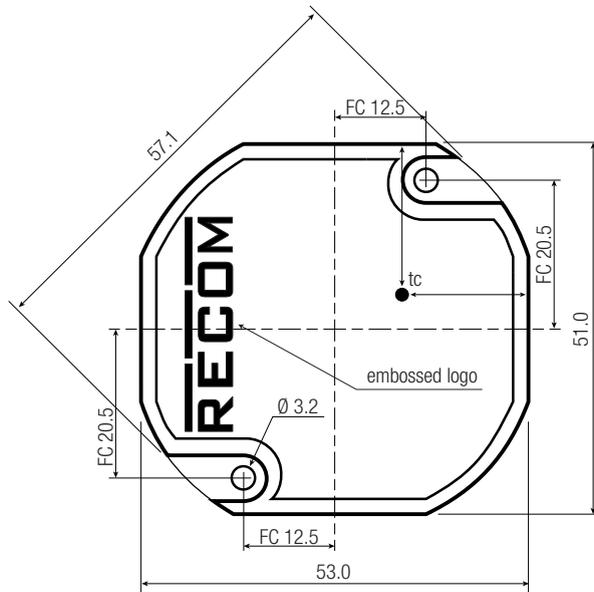

**Pin Connections**

Pin #	Single
1	+Vout
2	-Vout
3	VAC in (N)
4	VAC in (L)

tc= case temperature measuring point  
 FC= fixing centers  
 NC= no connection  
 Tolerance: xx.x= ±0.5mm  
 xx.xx= ±0.25mm

Max. tightening torque fixing screws: 0.3Nm

**Specifications** (measured @  $t_a = 25^\circ\text{C}$ , nom.  $V_{in}$  (115/230VAC), full load after warm-up unless otherwise stated)

PACKAGING INFORMATION		
Parameter	Type	Value
Packaging Dimension (LxWxH)	carton	310.0 x 220.0 x 100.0mm
Packaging Quantity		10pcs
Storage Temperature Range		$-30^\circ\text{C}$ to $+80^\circ\text{C}$
Storage Humidity	non-condensing	95% RH max.

The product information and specifications may be subject to changes even without prior written notice. The product has been designed for various applications; its suitability lies in the responsibility of each customer. The products are not authorized for use in safety-critical applications without RECOM's explicit written consent. A safety-critical application is an application where a failure may reasonably be expected to endanger or cause loss of life, inflict bodily harm or damage property. The applicant shall indemnify and hold harmless RECOM, its affiliated companies and its representatives against any damage claims in connection with the unauthorized use of RECOM products in such safety-critical applications.